

Please type a sign(+) inside this box



PTO/SB/05 (2/98)

Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR § 1.53(b))

Attorney Docket No.		1957.0010000
First Inventor or Application Identifier		William Bromley
Title	System, Method and Computer Program Product for Remote Vehicle Diagnostics, Monitoring, Configuring and Reprogramming	
Express Mail Label No.		

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents

ADDRESS TO: Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

- ☐ \* Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages 30 ]  
(preferred arrangement set forth below)  
- Descriptive title of the Invention  
- Cross References to Related Applications  
- Background of the Invention  
- Brief Summary of the Invention  
- Brief Description of the Drawings (if filed)  
- Detailed Description  
- Claim(s)  
- Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 12 ]
4. ☐ Oath or Declaration [Total Pages        ]  
a. ☐ Newly executed (original or copy)  
b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)  
[Note Box 5 below]  
i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR §§ 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)  
a. ☐ Computer Readable Copy  
b. ☐ Paper Copy (identical to computer copy)  
c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
14. ☐ \*Small Entity Statement(s) (PTO/SB/09-12) ☐ Statement filed in prior application, Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
16. ☒ Other: 37 C.F.R. § 1.136(a)(3) Authorization  
☐ Other:

\*NOTE FOR ITEMS 1 & 14 IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

17. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-Part (CIP) of prior application No:        /       

Prior application information: Examiner                      Group/Art Unit:                     

## 18. CORRESPONDENCE ADDRESS

☐ Customer Number  
or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence  
address below

NAME	STERNE, KESSLER, GOLDSTEIN & FOX P.L.L.C.				
	Attorneys at Law				
ADDRESS	Suite 600, 1100 New York Avenue, N.W.				
CITY	Washington	STATE	DC	ZIP CODE	20005-3934
COUNTRY	USA	TELEPHONE	(202) 371-2600	FAX	(202) 371-2540

NAME (Print/Type)	Raymond Miller	Registration No. (Attorney/Agent)	43,806
SIGNATURE		Date	8/8/00

Burden Hour Statement: this form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.



STERNE, KESSLER, GOLDSTEIN & FOX P.L.L.C.


ATTORNEYS AT LAW

1100 NEW YORK AVENUE, N.W., SUITE 600

WASHINGTON, D.C. 20005-3934

www.skgf.com

PHONE (202) 371-2600 FACSIMILE (202) 371-2540



ROBERT GREENE STERNE  
EDWARD J. KESSLER  
JORGE A. GOLDSTEIN  
SAMUEL L. FOX  
DAVID K.S. CORNWELL  
ROBERT W. ESMOND  
TRACY-GENE G. DURKIN  
MICHELE A. CIMBALA  
MICHAEL B. RAY  
ROBERT E. SOKOHL  
ERIC K. STEFFE  
MICHAEL Q. LEE

STEVEN R. LUDWIG  
JOHN M. COVERT\*  
LINDA E. ALCORN  
RAZ E. FLESHNER  
ROBERT C. MILLONIG  
MICHAEL V. MESSINGER  
JUDITH U. KIM  
TIMOTHY J. SHEA, JR.  
DONALD R. MCPHAIL  
PATRICK E. GARRETT  
STEPHEN G. WHITESIDE  
JEFFREY T. HELVEY\*

HEIDI L. KRAUS  
JEFFREY R. KURIN  
RAYMOND MILLIEN  
PATRICK D. O'BRIEN  
LAWRENCE B. BUGAISKY  
CRYSTAL D. SAYLES\*  
EDWARD W. YEE  
ALBERT L. FERRO\*  
DONALD R. BANOWIT  
PETER A. JACKMAN  
MOLLY A. MCCALL  
TERESA U. MEDLER

JEFFREY S. WEAVER  
KRISTIN K. VIDOVICH  
KENDRICK P. PATTERSON  
DONALD J. FEATHERSTONE  
GRANT E. REED  
VINCENT L. CAPUANO  
JOHN A. HARROUN\*  
MATTHEW M. CATLETT\*  
NATHAN K. KELLEY\*  
ALBERT J. FASULO II\*  
W. BRIAN EDGE\*

KAREN R. MARKOWICZ\*\*  
SUZANNE E. ZISKA\*\*  
BRIAN J. DEL BUONO\*\*  
ANDREA J. KAMAGE\*\*  
NANCY J. LEITH\*\*  
TARJA H. NAUKKARINEN\*\*

\*BAR OTHER THAN D.C.  
\*\*REGISTERED PATENT AGENTS

August 18, 2000

WRITER'S DIRECT NUMBER:  
(202) 789-5506

INTERNET ADDRESS:  
RMILLIEN@SKGF.COM

Commissioner for Patents  
Washington, D.C. 20231

*Box Patent Application*

Re: U.S. Non-Provisional Utility Patent Application under 37 C.F.R. § 1.53(b)  
Appl. No. To be assigned; Filed: August 18, 2000  
For: **System, Method and Computer Program Product for Remote Vehicle  
Diagnostics, Monitoring, Configuring and Reprogramming**  
Inventors: William BROMLEY, Brian R. CARL, Sam CHANG, Brian  
CRULL, Andrew DITCHFIELD, Dennis ESSENMACHER,  
Jerry HOSAK, Michael KAPOLKA, Sam KONYN,  
Thomas NAGI, and Charles WRIGHT  
Our Ref: 1957.0010000

Sir:

The following documents are forwarded herewith for appropriate action by the U.S.  
Patent and Trademark Office:

1. USPTO Utility Patent Application Transmittal Form PTO/SB/05;
2. U.S. Utility Patent Application entitled:

**System, Method and Computer Program Product for Remote Vehicle  
Diagnostics, Monitoring, Configuring and Reprogramming**

and naming as inventors:

Commissioner for Patents

August 18, 2000

Page 2

**William BROMLEY, Brian R. CARL, Sam CHANG, Brian CRULL,  
Andrew DITCHFIELD, Dennis ESSENMACHER, Jerry HOSAK, Michael  
KAPOLKA, Sam KONYN, Thomas NAGI, and Charles WRIGHT**

the application comprising:


- a. specification containing:
    - i. 23 pages of description prior to the claims;
    - ii. 6 pages of claims ( 12 claims);
    - iii. a one (1) page abstract;
  - b. Twelve (12) sheets of drawings: (Figures 1, 2A-B, 3, 4A-B, 5A-C, 6 A-B and 7 );
3. 37 C.F.R. § 1.136(a)(3) Authorization to Treat a Reply As Incorporating An Extension of Time (in duplicate); and
  4. Two (2) return postcards.

It is respectfully requested that, of the two attached postcards, one be stamped with the filing date of these documents and returned to our courier, and the other, prepaid postcard, be stamped with the filing date and unofficial application number and returned as soon as possible.

This patent application is being submitted under 37 C.F.R. § 1.53(b) without Declaration and without filing fee.

Respectfully submitted,

STERNE, KESSLER, GOLDSTEIN & FOX P.L.L.C.



Raymond Millien  
Attorney for Applicants  
Registration No. 43,806

**SYSTEM, METHOD AND COMPUTER PROGRAM PRODUCT  
FOR REMOTE VEHICLE DIAGNOSTICS, MONITORING,  
CONFIGURING AND REPROGRAMMING**

***Inventors:*** William Bromley  
Brian R. Carl  
Sam Chang  
Brian Crull  
Andrew Ditchfield  
Dennis Essenmacher  
Jerry Hosak  
Michael Kapolka  
Sam Konyon  
Thomas Nagi  
Charles Wright

***Background of the Invention***

***Field of the Invention***

The present invention relates generally to computer data and information systems, and more particularly to computer tools for storing, processing, and displaying fleet vehicle information.

***Related Art***

In today's business environment, it is common for companies to own a large amount (i.e., a fleet) of motor vehicles. A company, depending on their particular line of business, may have a fleet of passenger cars, light trucks, vans, heavy trucks or any combination of these types of vehicles. Typical examples of such companies include commercial courier services, moving companies, freight and trucking companies, as well as passenger vehicle leasing companies and passenger carriers.

Such companies must typically manage each of the hundreds of vehicle within their fleets. The most critical management operations include the maintenance and repair, and maximizing the efficiency of these vehicles. In addition, timely reporting of key information related to the vehicle, such as

mileage, trip information, fluid status, and other parameters must be available in a timely fashion. In order to maximize profits, a company must maximize the amount of time each vehicle spends performing its intended function. That is, a company must minimize the amount of time each vehicle spends in a service environment (i.e., a repair and maintenance facility). Further complicating the situation is the fact that the vehicles within a company's fleet may operate throughout the nation's roads, but repair and maintenance facilities and vehicle configuration facilities are sparsely located in certain geographic locations.

One management technique has traditionally been to schedule vehicles for routine inspections on a rotating basis. While this technique has improved efficiency somewhat, it still involves taking a percentage of the fleet's vehicles out of service when in fact, they may not need to be in a service environment or may not be available to be serviced or configured.

One development has led to the decrease in the amount of time vehicles needed to be in the service environment during routine inspections. That is, during the '70s and early 1980's manufacturers started using electronic means to control engine functions and diagnose engine problems. This effort was primarily motivated to meet new and tougher Environmental Protection Agency (EPA) emission standards. Nevertheless, onboard diagnostic systems eventually became more sophisticated. Vehicles today typically include several controllers attached to a vehicle data bus that allow the engine and parts of the vehicle's chassis, body and accessory devices to be monitored.

Several instruments were designed to take advantage of vehicles onboard diagnostic and control systems. First, there were large pieces of equipment to perform diagnostics and these were followed by hand-held devices. These instruments increased the speed and efficiency of vehicle maintenance and configuration. Such instruments, however, did not eliminate the need for vehicles, which may be operating nation-wide, to be brought to a centralized (or regional) repair and maintenance facility. That is, these devices needed to be connected directly to the vehicle. Further, there still has not been any systematic way for companies to remotely diagnose, monitor or configure their fleet's

vehicles. That is, routine maintenance or configuration on a rotating basis is arbitrary and not based on which specific vehicles really require service.

Therefore, given the above, what is needed is a system, method, and computer program product for remote vehicle diagnostics, monitoring, configuring and reprogramming. The system, method, and computer program product should allow fleet managers, without heavy infrastructure additions, to take advantage of today's vehicle's onboard diagnostic systems, computer advances, and mobile communications in order to remotely diagnose, monitor and reprogram their fleet's vehicles.

### ***Summary of the Invention***

The present invention meets the above-mentioned needs by providing a system, method, and computer program product for remote vehicle diagnostics, monitoring, configuring and reprogramming.

The system of the present invention allows a user to perform total fleet logistics by facilitating vehicle parameter changes, vehicle health tracking, and receipt of vehicle maintenance need indications, thus eliminating the need to physically bring vehicles to a repair and maintenance facility. More specifically, the system includes a plurality of vehicles each having an onboard unit as described herein. The onboard unit is coupled to the vehicle data bus of each of the plurality of vehicles, which in turn is connected to the vehicle's several controllers.

The system further includes an application server which provides the user with a graphical user interface (GUI) (e.g., Web pages over the Internet) in order to send and receive data from each of the plurality of vehicles. A repository database, accessible via the application server, is also included which stores information related to the subscribers of the system and the specifics in relation to the vehicles in their fleet.

An onboard unit server, coupled to the application server, is also included which contains means to convert command data between a format understandable

by the user using the GUI (e.g., change max cruise speed to 55 MPH") and a format understandable by the vehicle data bus of each of the plurality of vehicles (e.g., a binary data stream). Finally, the system includes a communications means, coupled to the onboard unit server, for handling (mobile) communications between the onboard unit server and the onboard units located on each of the plurality of vehicles.

The method and computer program product of the present invention includes the steps of accessing the repository database in order to provide the user with a list of specific vehicles within the fleet and the vehicles' associated vehicle parameters. Next, a command from the user is received via the GUI. The command typically includes information specifying at least one vehicle within the fleet and at least one vehicle parameter. Then, the command is stored in the repository database along with the time and date that the command was received from the user. Next, the command is converted from a format understandable by the user using the GUI, to a format understandable by the vehicle data bus of the at least one vehicle within the fleet.

The method and computer program product of the present invention further includes sending the command, via a wireless mobile communications system to the onboard unit located on the targeted vehicle within the fleet. This causes the previously specified vehicle parameter to be read or changed (depending on whether, for example, the command was related to diagnostic or reprogramming activities respectively). Next, an acknowledgment of the command is received from the vehicle via the wireless mobile communications system. Finally, the acknowledgment is stored in the repository database so that the user may later retrieve it using the GUI.

One advantage of the present invention is that it allows a large fleet (e.g., several hundred) of commercial vehicles (e.g., a fleet of commercial delivery vans and/or trucks), of different makes and models, to be remotely configured, monitored, re-calibrated, and diagnosed without having to be brought to a centralized location (e.g., company headquarters). That is, the present invention provides a means for obtaining "total population" vehicle information.

Another advantage of the present invention is that it provides tampering alert notification should any vehicle parameter be changed without authorization once the vehicle leaves a company location or headquarters.

Another advantage of the present invention is that it provides users (e.g., fleet managers, vehicle distributors, vehicle dealers and the like) with a consistent graphical user interface, regardless of the vehicle makes and models that comprise their fleet.

Another advantage of the present invention is that it enables users to obtain real-time fleet characteristics, trend analysis and diagnostics, as well as allow fleet managers to provide real-time driver/fleet notification.

Yet another advantage of the present invention is that it allows parametric data capture, diagnostic code capture, trip data capture, system reconfiguration, system re-calibration, and correlation analysis to be performed on a fleet of vehicles on a customer-specified schedule.

Further features and advantages of the invention as well as the structure and operation of various embodiments of the present invention are described in detail below with reference to the accompanying drawings.

### ***Brief Description of the Figures***

The features and advantages of the present invention will become more apparent from the detailed description set forth below when taken in conjunction with the drawings in which like reference numbers indicate identical or functionally similar elements. Additionally, the left-most digit of a reference number identifies the drawing in which the reference number first appears.

**FIG. 1** is a block diagram illustrating the system architecture of an embodiment of the present invention, showing connectivity among the various components;

**FIG. 2A** is a block diagram of the physical architecture of an onboard unit according to a preferred embodiment of the present invention;



**FIG. 2B** is a block diagram of the software architecture of an onboard unit according to a preferred embodiment of the present invention;

**FIG. 3** is a flowchart depicting an embodiment of the operation and control flow of the remote vehicle diagnostics, monitoring and reprogramming tool of the present invention;

**FIGS. 4A-4B** are windows or screen shots, relating to vehicle alerts, generated by the graphical user interface of the present invention;

**FIGS. 5A-5C** are windows or screen shots, relating to vehicle parameter readings, generated by the graphical user interface of the present invention;

**FIGS. 6A-6B** are windows or screen shots, relating to vehicle parameter reprogramming, generated by the graphical user interface of the present invention; and

**FIG. 7** is a block diagram of an exemplary computer system useful for implementing the present invention.

## ***Detailed Description of the Preferred Embodiments***

### TABLE OF CONTENTS

I.	Overview
II.	System Architecture
III.	On Board Units
IV.	Detailed Example of System Operation
V.	Graphical User Interface
VI.	Example Implementations
VII.	Conclusion

## **I. Overview**

The present invention relates to a system, method, and computer program product for remote commercial vehicle diagnostics, monitoring, configuring and reprogramming. The remote vehicle diagnostics, monitoring, configuration and reprogramming tool described herein will become essential to any business concern which deals with commercial fleet maintenance and service operations (i.e., it is a "total fleet logistics" tool).

In an embodiment of the present invention, an application service provider provides and allows access, on a subscriber basis, to a remote vehicle diagnostics, monitoring, configuration and reprogramming tool via the global Internet. That is, the application service provider would provide the hardware (e.g., servers) and software (e.g., database) infrastructure, application software, customer support, and billing mechanism to allow its customers (e.g., fleet managers, vehicle distributors, vehicle dealers, original equipment manufacturers (OEM), leasing/rental companies, and the like) to remotely diagnose, monitor, configure and/or reprogram, as appropriate, the vehicles within a fleet. The tool would be used by subscribers to obtain real-time fleet characteristics, trend analysis and diagnostics, to perform manual, dynamic or rule based configuration, as well as allow fleet managers to provide real-time driver/fleet notification.

More specifically, the application service provider would provide a World Wide Web site where a fleet manager, using a computer and Web browser software, to remotely diagnose, monitor, configure, and/or reprogram the commercial vehicles for which they are responsible. Such fleet managers would include, for example, those responsible for overseeing a fleet of trucks for a commercial trucking or delivery company. Other users of the remote vehicle diagnostics, monitoring, configuring, and reprogramming tool would also include vehicle dealers, OEMs, and distributors who wish to obtain data concerning the performance of the vehicles within a fleet for "market intelligence" or "improved performance" purposes.

In an alternate embodiment, the remote vehicle diagnostics, monitoring, configuring and reprogramming tool of the present invention may be run, instead of on the global Internet, locally on proprietary equipment owned by the customers (i.e., the fleet managers, vehicle distributors, vehicle dealers and the like) as a stand alone software application. In yet another embodiment, users may access the remote vehicle diagnostics, monitoring, configuring and reprogramming tool of the present invention via direct dial-up lines rather than through the global Internet.

The remote vehicle diagnostics, monitoring, configuring, and reprogramming tool of the present invention would be utilized, as suggested above, by fleet manager users, for example, in order to facilitate vehicle parameter changes, track vehicle health, and/or receive indications of vehicle maintenance needs.

In an alternate embodiment, the remote vehicle diagnostics, monitoring, configuring and reprogramming tool of the present invention would be utilized by a vehicle component suppliers to re-calibrate any vehicle component, perform firmware downloads, perform component failure analysis, and determine wear characteristics.

In an alternate embodiment, the remote vehicle diagnostics, monitoring, configuring and reprogramming tool of the present invention would be utilized by vehicle manufacturers to analyze quality of components (and thus, suppliers) utilized in their manufacturing processes, and/or retrieve and manage warranty information.

In yet another embodiment, the remote vehicle diagnostics, monitoring, configuring and reprogramming tool of the present invention would be utilized by vehicle leasing companies to receive indications of vehicle maintenance needs, monitor vehicle use and abuse, and/or monitor lessee trip information.

In yet another alternate embodiment, the remote vehicle diagnostics, monitoring and reprogramming tool of the present invention would be utilized by vehicle dealers or vehicle repair facility personnel to perform proactive data

analysis, perform pre-arrival diagnostics, re-calibrate vehicle components, and/or perform firmware downloads.

The present invention is described in terms of the above examples. This is for convenience only and is not intended to limit the application of the present invention. In fact, after reading the following description, it will be apparent to one skilled in the relevant art(s) how to implement the following invention in alternative embodiments (e.g., to remotely manage different types and different aspects of vehicles--non-commercial or commercial, etc.).

The terms "user," "subscriber," "company," "business concern," and the plural form of these terms are used interchangeably throughout herein to refer to those who would access, use, and/or benefit from the remote vehicle diagnostics, monitoring and reprogramming tool of the present invention.

## **II. System Architecture**

Referring to **FIG. 1**, a block diagram illustrating the physical architecture of a total fleet logistics ("TFL") system 100, according to an embodiment of the present invention. **FIG. 1** also shows network connectivity among the various components.

The TFL system 100 includes a plurality of users 102 (e.g., fleet managers, vehicle distributors, OEMs, vehicle dealers and the like) which would access to system 100 using a personal computer (PC) (e.g., an IBM™ or compatible PC workstation running the Microsoft® Windows 95/98™ or Windows NT™ operating system, Macintosh® computer running the Mac® OS operating system, or the like), running a commercially available Web browser. In alternative embodiments, users 102 may access TFL system 100 using any processing device including, but not limited to, a desktop computer, laptop, palmtop, workstation, set-top box, personal data assistant (PDA), and the like.

The users 102 would connect to the parts (i.e., infrastructure) of the TFL system 100 which are provided by the TFL application service provider (i.e., elements 106-124 of **FIG. 1**) via the global Internet 104. The connection to the

Internet 104, however, is through a firewall 106. The components of the TFL system 100 are divided into two regions--"inside" and "outside." The components in the "inside" region refer to those components that the TFL application service provider would have as part of their infrastructure in order to provide the tools and services contemplated by the present invention. As will be apparent to one skilled in the relevant art(s), all of components "inside" of the TFL system 100 are connected and communicate via a wide or local area network (WAN or LAN) running a secure communications protocol (e.g., secure sockets layer (SSL)). The firewall 106 serves as the connection and separation between the LAN, which includes the plurality of elements (e.g., elements 108-124) "inside" of the LAN, and the global Internet 104 "outside" of the LAN. Generally speaking, a firewall is a dedicated gateway machine (e.g., a SUN Ultra 10) with special security precaution software. It is typically used, for example, to service Internet 104 connections and dial-in lines, and protects the cluster of more loosely administered network elements hidden behind it from external invasion. Firewalls are well known in the relevant art(s) and firewall software is available from many vendors such as Check Point Software Technologies Corporation of Redwood City, CA.

TFL system 100 also includes two servers--an application server 108 and an onboard unit server ("OBU") 118.

The application server 108 is the "back-bone" (i.e., TFL processing) of the present invention. It provides the "front-end" for the TFL system 100. That is, application server 108 includes a Web service 110 which is a typical Web server process running at a Web site which sends out Web pages in response to Hypertext Transfer Protocol (HTTP) requests from remote browsers (i.e., subscribers 102 of the TFL application service provider). More specifically, a Web server 112 provides graphical user interface (GUI) "front-end" screens to users 102 of the TFL system 100 in the form of Web pages. These Web pages, when sent to the subscriber's PC (or the like), would result in GUI screens being displayed. In an embodiment of the present invention, the server 112 would be implemented using a Netscape Enterprise or compatible Web server, an Apache

web server or the like. Connected to the server 112 is an application server 114 which facilitates the data and commands between a repository database 116 and the Web pages on Web server 112. In an embodiment of the present invention, the server 114 would be an Oracle application server.

Also included in the application server 108 is a TFL repository database 116. Database 116, in an embodiment of the present invention, is a Sun E250 machine running the Oracle 8i RDBMS (relational database management server) software. The database 116 is the central store for all information within the TFL system 100 and also stores Web page executable code (e.g., PL/SQL and HTML).

The OBU server 118 is responsible, generally, for routing data between the smart device onboard units 130 within each vehicle (explained in detail below) and the application server 108. The OBU server 118 includes three software modules, implemented in a high level programming language such as the C++ programming language--a dispatcher 120, a communications service 122, and a conversion service 124. The dispatcher 120 is a software module resident on the OBU server 118 and is responsible for serving as an intermediary to route messages between the remaining two components of the OBU server 118 (i.e., the communications service 122 and the conversion service 124).

The communications service 122 is a module that contains software code logic that is responsible for handling in-bound and out-bound vehicle data and commands. As will be described in more detail below, the communications service 122 is configured for the specific means of mobile communications employed within TFL system 100 (e.g., satellite or terrestrial wireless).

The conversion service 124 is a module that contains software code logic that is responsible for converting raw vehicle data (i.e., telemetry) into human-readable format, and vice-versa. In an embodiment of the present invention, the conversion service 124 module includes a relational database implemented in Microsoft® Access or the like which stores telemetry data definitions for a plurality of vehicle makes, models, and associated components. Such definitions would include vehicle component masks, bit length, and data stream order definitions for various vehicle (and component) manufacturers in order to

perform the binary (raw) data conversion into human-readable form, and vice-versa.

5 TFL system 100 also includes an administrative workstation 134. This workstation can be used by personnel of the TFL application service provider to upload, update, and maintain subscriber information (e.g., logins, passwords, etc.) and fleet-related data for each of the users 102 that subscribe to the TFL system 100. The administrative workstation 134 may also be used to monitor and log statistics related to the application server 108 and system 100 in general. Also, the administrative workstation 134 may be used "off-line" by subscribers 102 of  
10 the TFL system 100 in order to enter configuration data for supported controllers 132, etc. within their fleet(s). This data is eventually stored in TFL repository database 116.

15 TFL system 100 also includes a plurality of vehicles 128 (i.e., the "fleet" being remotely diagnosed, monitored and/or reprogrammed). (**FIG. 1** shows only one vehicle 128 for ease of explanation herein.) Within each vehicle is a smart device onboard unit 130, explained in more detail below. In an embodiment of the present invention, the onboard units 130 have access to a plurality of controllers or discrete measurement points 132 (shown as controllers 132a-n in **FIG. 1**) found within the vehicle 128 (e.g., brake, engine, transmission, and various other vehicle electrical component controllers). Such access is through the vehicle data bus (not shown) of each of the vehicles 128. Further, the onboard units 130 include transceivers that communicate with a communications service provider 126. Like the communications service module 122, the onboard units 130 are configured for the specific means of wireless mobile communications  
20 employed within TFL system 100 (e.g., satellite or terrestrial wireless).  
25

More detailed descriptions of the TFL system 100 components, as well their functionality, are provided below.

### III. On Board Units

Referring to FIG. 2A, a block diagram of the physical architecture of the onboard unit 130, in a preferred embodiment of the present invention, is shown. The onboard unit 130 handles communications between the vehicle controllers 132 and the remainder of the TFL system 100.

In a preferred embodiment of the present invention, the onboard unit 130 is a small (e.g., 5" x 6" x 2") computer board which contains a 32-bit RISC architecture central processing unit (CPU) 202 such as the Intel® Strong ARM 32-bit chip, a 4 megabyte (MB) random access memory (RAM) 204, a 4MB flash memory 206, a power supply 208, and a compact flash interface memory 210.

Further, onboard unit 130 also includes a user interface channel ports 212 and a vehicle interface channel ports 214. In an embodiment of the present invention, the user interface channel ports 212 contain interface modules for several wire and wireless mobile communications standard devices such as universal serial bus (USB), standard parallel ports, standard serial ports, satellite communications, code division multiple access (CDMA), time division multiple access (TDMA), the Bluetooth® wireless standard chip, intellect data bus (IDB), and the like. This would allow the TFL application service provider to utilize several of the available providers 126 to communicate with vehicles 128 in their subscriber's fleets.

In an embodiment of the present invention, the vehicle interface channel ports 214 contain interface modules for several standard automotive application program interfaces (API's). Such API's include *Serial Data Communications Between Microcomputer Systems in Heavy-Duty Vehicle Applications*, Document No. J1708, Society of Automotive Engineers (SAE) of Warrendale, PA (October 1993); *Joint SAE/TMC Electronic Data Interchange Between Microcomputer Systems in Heavy-Duty Vehicle Applications*, Document No. J1587, SAE (July 1998); and *Recommended Practice for Truck and Bus Control and Communications Network*, Document No. J1939, SAE (April 2000); all of which are incorporated herein by reference in their entirety. Other such API's include



SAE's onboard diagnostic system (OBD) II standard and several vehicle manufacturer specific/proprietary interfaces and discrete measurement point interfaces.

Referring to **FIG. 2B**, a block diagram of the software architecture of the onboard unit 130, in a preferred embodiment of the present invention, is shown. Onboard unit 130 contains three main software modules, implemented in a high level programming language such as the C++ programming language, and executing on the CPU 202. These modules include a command server module 210, a plurality of application specific modules 220 (shown as application specific modules 220a-n), and a data parser/requester module 230.

The command server module 210 contains software code logic that is responsible for handling the receiving and transmitting of the communications from the provider 126 and relays such data to either the data parser/requester module 230 or to one of the application specific modules 220, as applicable.

The application specific modules 220 (one for each manufacturer specific controller 132 within the vehicle) each contain software code logic that is responsible for handling interfacing between the command server module 210 to the vehicle data bus 240 (via data parser/requestor module 230) for application specific (i.e., manufacturer specific) parameter readings, alerts, configuration or reprogramming data (as explained in detail below).

The data parser/requester module 230 contains software code logic that is also responsible for handling direct interfacing between the command server module 210 to the vehicle data bus 240 for non-application specific (i.e., "generic" SAE J1708 or SAE1939 discrete measurement points) parameter readings, alerts, configuration or reprogramming data (as explained in detail below).

In an embodiment of the present invention, the onboard unit 130 is designed to be compliant with the SAE's *Joint SAE/TMC Recommended Environmental Practices for Electronic Equipment Design (Heavy-Duty Trucks)*, Document No. J1455 (August 1994) standard, which is incorporated herein by reference in its entirety, because it will be a component included (or installed)

within vehicles 132. That is, the onboard unit 130 is physically mounted on the vehicle 128, electrically coupled to the vehicle data bus 240 via the wiring harness of the vehicle 128, and packaged in a manner that resists environmental seepage of dirt and moisture, as well as withstands operational vibration. Further, the onboard unit 130 must be built to withstand, in a preferred embodiment, industrial temperature ranges of -40 to 85 degrees centigrade.

In an alternate embodiment of the present invention, the onboard unit 130 would include a global positioning (GPS) receiver component, which would allow the TFL system 100 to provide location-based logistical management features to users 102.

More details of the onboard unit 130 architecture and functionality are provided below in connection with the description of the TFL system 100 operation.

#### ***IV. Detailed Example of System Operation***

Referring to **FIG. 3**, a flow chart of a sample control flow 300, according to an embodiment of the present invention, is shown. More specifically, control flow 300 depicts a fleet manager user 102 reprogramming a fleet vehicle parameter with reference to the elements of TFL system 100 described above with reference to **FIG. 1**. (Also see **FIG. 6** described below.) Control flow 300 begins at step 302, with control passing immediately to step 304.

In step 304, the user 102 enters their password in order to login into the TFL system 100. Such login would be provided by a Web page sent out over the Internet 104 (and accessed by user 102 using a PC or the like) by Web service 110. Subscriber information would be kept by the TFL application service provider in the TFL repository database 116.

After the user is logged in, in step 306, the user then enters their vehicle list selection. The vehicle choices (i.e., entire fleet(s), division(s) of vehicles within a fleet, or specific individual vehicles) available for selection are stored for each subscriber in the TFL repository database 116. Once presented with a GUI

of available vehicles, in step 308, the user 102 would then enter the parameter(s) (e.g., max cruise speed) they would like to reprogram on the specific vehicle(s) selected in step 306. In step 310, the user 102 would enter the new setting(s) (e.g., 55 MPH) for the selected parameter(s).

5 In step 312, the application server 108 receives the settings and translates the reprogramming request into a list of commands--one command for each vehicle--and forwards these commands to the dispatcher module 120 located on the onboard unit (OBU) server 118. In step 314, the dispatcher 120 forwards each command to the conversion service 124. In step 316, the conversion service  
10 124 translates the user entered setting(s) (e.g., "55 MPH") to a binary format understandable to the onboard unit 130 such that it can process the command according to the requirements of the targeted vehicle controller 132. This translation is facilitated by the relational database (as described above) located within the conversion service 124. Once translated, the command (now in binary)  
15 is sent back to the dispatcher 120.

In step 318, the conversion service 124 forwards the command to the communications service 122. In step 320, the communications service 122 further encodes and compresses the command (for efficiency of transmission), and routes the command, (passing the firewall 106 and) via the Internet 104, to  
20 the communications provider 126. In step 322, the communications provider 126 forwards the command to the onboard unit 130 on the vehicle 128.

As mentioned above, step 322 may be accomplished, depending on the embodiment of the present invention (i.e., according to the provider 126 selected by or available to the TFL application service provider), via any wire or wireless  
25 mobile communications standard such as USB, parallel ports, serial ports, satellite communications, CDMA, TDMA, the Bluetooth® wireless standard, IDB, and the like.

In an embodiment of the present invention, more than one communication service provider 126 (and thus more than one means of mobile communications)  
30 would be utilized by the TFL application service provider in order to maximize the number of different vehicles 128 belonging to different subscribers 102 that

may be diagnosed, monitored and/or reprogrammed by the TFL system 100. Consequently, the OBU server 118 would contain multiple communications service 122 modules, each configured for specific communication service provider 126.

5           In step 324, the command is received by the command server module 210 executing on the CPU 202 of the onboard unit 130. In step 326, the command is forwarded to the vehicle data bus 240 by the data parser requester module 230 executing on the CPU 202 of the onboard unit 130. The command thus finally reaches the appropriate controller 132 within the vehicle 128. Control flow 300  
10 then ends as indicated by step 328.

As will be apparent to one skilled in the relevant art(s) after reading the above, an acknowledgment of the reprogramming command from the vehicle 128 to the user 102 would flow in the reverse direction from control flow 300. Further, the acknowledgment would be stored in database 116 for the user 102 to (later) retrieve.  
15

It should be understood that control flow 300, which highlights the reprogramming functionality of TFL system 100, is presented for example purposes only. The software architecture of the present invention is sufficiently flexible and configurable such that users 102 may navigate through the system 100 in ways other than that shown in **FIG. 3**.  
20

#### ***V. Graphical User Interface***

As mentioned above, the application server 108 will provide a GUI for users 102 (e.g., fleet managers, vehicle distributors, OEMs, vehicle dealers and the like) to enter inputs and receive the outputs as described, for example, in control flow 300. In an embodiment of the present invention, the GUI screens of the present invention may be classified into three categories: alerts (e.g., threshold alerts, tamper warnings, etc.), parameter readings, and reprogramming. **FIGS. 4-6**, presented below, show examples GUI screens reflecting these three categories  
25

respectively. They also highlight the functionality and features of TFL system 100 in general.

Referring to **FIG. 4A**, a "set alert" GUI screen 410 with representative data, according to an embodiment of the present invention, is shown. Screen 400 includes a column 402 labeled "Vehicle Unit ID" which indicates the vehicles within a fleet the user 102 has previously selected to receive alerts for. Screen 400 includes a column 404 labeled "Description" which indicates the type of vehicle 128 corresponding the Vehicle Unit ID in column 402. Screen 400 also includes a column 406 labeled "T. Codes" which is a check box the user 102 can select to indicate that they wish to track alert codes for all available parameters within a specific vehicle 128. Lastly, screen 400 includes a column 408 labeled "Tamper" which is a check box the user 102 can select to indicate whether they wish to track whether any parameter within a specific vehicle 128 has been physically tampered with.

Referring to **FIG. 4B**, a "view alert" GUI screen 410 with representative data, according to an embodiment of the present invention, is shown. Screen 410 includes a column 412 labeled "Reading Date/Time" which indicates the actual date and time a particular alert was generated for a particular vehicle specified in a column 414 labeled "Vehicle ID." In a column 416, the parameter name (e.g., vehicle speed limit) for which the alert was generated is displayed. Screen 410 also includes a column 418 labeled "Alert Value," where a description of the alert is displayed.

Referring to **FIG. 5A**, a "select parameter" GUI screen 500, according to an embodiment of the present invention, is shown. Screen 500 includes four categories 502a-d of parameters a user 102 may select. Within each category 502, there are specific vehicle parameters 504a-d that the user 102 may choose from. Selected parameters 504 or categories of parameters 502 will result in the TFL system 100 system obtaining these parameter readings from each of the vehicles 128 that the user 102 has previously selected.

Referring to **FIG. 5B**, a "select parameter transactions" GUI screen 510 with representative data, according to an embodiment of the present invention,

is shown. Screen 510 includes a column 512 labeled "Transaction Description." This column indicates the names of the different transactions created by one or more users 102 which manage the same fleet of vehicles. In an embodiment of the present invention, a "transaction" is a section of different parameter categories 502 and/or specific vehicle parameters 504 selected by a user 102 using screen 500 and saved in the TFL system 100 using a "transaction" name shown in column 512 of screen 510. A column 513 indicates the ID (i.e., login name) of the particular user 102 which created the transaction. A column 514 indicates the date that the user 102 created the transaction. A column 516 labeled "Param Profile Requested" indicates the category 502 of parameters that the user 102 selected in GUI screen 500 for the corresponding transaction. A column 518 allows the user 102 to select the transactions they would like to view for the specific vehicles 128 previously selected.

Referring to **FIG. 5C**, a "view parameter results" GUI screen 520, according to an embodiment of the present invention, is shown. Screen 520 includes a column 522 labeled "Vehicle Unit ID" which indicates the vehicles within a fleet the user 102 has previously selected to receive parameter readings from. Screen 520 also includes several parameter reading columns 524 which indicate the parameter values read from the selected vehicles 128 and correspond to the transaction selected by a user 102 using the select buttons in column 518 on screen 510.

Referring to **FIG. 6A**, an "enter parameter values for reprogramming" GUI screen 600, according to an embodiment of the present invention, is shown. Screen 600 includes a column 602 labeled "Vehicle Unit ID" which indicates the vehicles within a fleet the user 102 has previously selected to reprogram. (See control flow 300 described above with reference to **FIG. 3**.) Screen 600 includes a column 604 labeled "Description" which indicates the type of vehicle 128 corresponding the Vehicle Unit ID in column 602. Screen 600 also includes a column 606 labeled "Current Setting" which indicates the current value of the previously selected parameter that user 102 desires to reprogram (i.e., change). Lastly, screen 600 includes a column 608 labeled "New Setting" which is an

input box where the user can enter a new value for the previously selected vehicle 128 parameter.

Referring to **FIG. 6B**, a "view reprogramming results " GUI screen 610, according to an embodiment of the present invention, is shown. Screen 610 includes a column 612 labeled "Vehicle" which indicates the vehicles 132 within a fleet the user 102 has previously selected to reprogram. A column 614 indicates the name of the previously selected vehicle parameter for which status information is now being viewed by user 102. A column 616 indicates the date and time that the user 102 submitted the reprogramming request using screen 600. A column 618 labeled "Current" indicates the present value (at last reading and presently stored in repository 116) for the corresponding vehicle parameter shown in column 614. A column 620 labeled "Requested" indicates the new reprogrammed value requested by user 102 using column 608 of screen 600. Screen 610 also includes a column 622 labeled "Status" which indicates the current status (as read from the vehicle 128) of the reprogramming command sent by the TFL system 100.

It should be understood that the screens shown in this section (i.e., **FIGS. 4-6**), which highlights the functionality of TFL system 100, are presented for example purposes only. The software architecture (and thus, GUI screens) of the present invention is sufficiently flexible and configurable such that users 102 may navigate through the system 100 in ways other than those shown in **FIGS. 4-6**. Further, the information described therein can be presented to the user 102 in ways other than shown in **FIGS. 4-6**.

In an embodiment of the present invention, reprogramming commands to be sent to specific vehicles 128 and parameter readings to be read from specific vehicles 128 can be scheduled by the TFL system 100. That is, the user 102 may specify, for example, pre-defined time periods that parameter readings should be taken for specific vehicles within a fleet. Such pre-defined time periods can be hourly, daily,  $x$  times per day, weekly,  $y$  times per week, monthly, etc.

## **VI. Example Implementations**

The present invention (i.e., TFL system 100, onboard unit 130, control flow 300, and/or any part(s) thereof) may be implemented using hardware, software or a combination thereof and may be implemented in one or more computer systems or other processing systems. In fact, in one embodiment, the invention is directed toward one or more computer systems capable of carrying out the functionality described herein. An example of a computer system 700 is shown in **FIG. 7**. The computer system 700 includes one or more processors, such as processor 704. The processor 704 is connected to a communication infrastructure 706 (e.g., a communications bus, cross-over bar, or network). Various software embodiments are described in terms of this exemplary computer system. After reading this description, it will become apparent to a person skilled in the relevant art(s) how to implement the invention using other computer systems and/or computer architectures.

Computer system 700 can include a display interface 705 that forwards graphics, text, and other data from the communication infrastructure 702 (or from a frame buffer not shown) for display on the display unit 730.

Computer system 700 also includes a main memory 708, preferably random access memory (RAM), and may also include a secondary memory 710. The secondary memory 710 may include, for example, a hard disk drive 712 and/or a removable storage drive 714, representing a floppy disk drive, a magnetic tape drive, an optical disk drive, etc. The removable storage drive 714 reads from and/or writes to a removable storage unit 718 in a well known manner. Removable storage unit 718, represents a floppy disk, magnetic tape, optical disk, etc. which is read by and written to by removable storage drive 714. As will be appreciated, the removable storage unit 718 includes a computer usable storage medium having stored therein computer software and/or data.

In alternative embodiments, secondary memory 710 may include other similar means for allowing computer programs or other instructions to be loaded into computer system 700. Such means may include, for example, a removable



storage unit 722 and an interface 720. Examples of such may include a program cartridge and cartridge interface (such as that found in video game devices), a removable memory chip (such as an EPROM, or PROM) and associated socket, and other removable storage units 722 and interfaces 720 which allow software and data to be transferred from the removable storage unit 722 to computer system 700.

Computer system 700 may also include a communications interface 724. Communications interface 724 allows software and data to be transferred between computer system 700 and external devices. Examples of communications interface 724 may include a modem, a network interface (such as an Ethernet card), a communications port, a PCMCIA slot and card, etc. Software and data transferred via communications interface 724 are in the form of signals 728 which may be electronic, electromagnetic, optical or other signals capable of being received by communications interface 724. These signals 728 are provided to communications interface 724 via a communications path (i.e., channel) 726. This channel 726 carries signals 728 and may be implemented using wire or cable, fiber optics, a phone line, a cellular phone link, an RF link and other communications channels.

In this document, the terms "computer program medium" and "computer usable medium" are used to generally refer to media such as removable storage drive 714, a hard disk installed in hard disk drive 712, and signals 728. These computer program products are means for providing software to computer system 700. The invention is directed to such computer program products.

Computer programs (also called computer control logic) are stored in main memory 708 and/or secondary memory 710. Computer programs may also be received via communications interface 724. Such computer programs, when executed, enable the computer system 700 to perform the features of the present invention as discussed herein. In particular, the computer programs, when executed, enable the processor 704 to perform the features of the present invention. Accordingly, such computer programs represent controllers of the computer system 700.

In an embodiment where the invention is implemented using software, the software may be stored in a computer program product and loaded into computer system 700 using removable storage drive 714, hard drive 712 or communications interface 724. The control logic (software), when executed by the processor 704, causes the processor 704 to perform the functions of the invention as described herein.

In another embodiment, the invention is implemented primarily in hardware using, for example, hardware components such as application specific integrated circuits (ASICs). Implementation of the hardware state machine so as to perform the functions described herein will be apparent to persons skilled in the relevant art(s).

In yet another embodiment, the invention is implemented using a combination of both hardware and software.

## ***VII. Conclusion***

While various embodiments of the present invention have been described above, it should be understood that they have been presented by way of example, and not limitation. It will be apparent to persons skilled in the relevant art(s) that various changes in form and detail can be made therein without departing from the spirit and scope of the invention. Thus the present invention should not be limited by any of the above-described exemplary embodiments, but should be defined only in accordance with the following claims and their equivalents.

***What Is Claimed Is:***

1        1.        A system for allowing a user to perform remote vehicle diagnostics,  
2        vehicle monitoring, vehicle configuration and vehicle reprogramming for one or  
3        more vehicles, comprising:

4                (A)        an onboard unit coupled to the data bus of the one or more  
5        vehicles;

6                (B)        an application server which provides the user with a graphical user  
7        interface (GUI) in order to send and receive data from each of the one or more  
8        vehicles;

9                (C)        a repository database, accessible via said application server, which  
10       stores information related to the one or more vehicles;

11               (D)        an onboard unit server, coupled to said application server, which  
12       contains means to convert data between a format understandable by the user using  
13       said GUI, and a format understandable by said onboard unit coupled to the data  
14       bus of the one or more vehicles; and

15               (E)        a communications means, coupled to said onboard unit server, for  
16       handling communications between said onboard unit server and said onboard  
17       units located on the one or more vehicles;

18               whereby said system allows the user to perform total fleet logistics by  
19       facilitating vehicle parameter changes, vehicle health tracking, and receipt of  
20       vehicle maintenance need indications, thus eliminating the need to physically  
21       bring the one or more vehicles to a repair, maintenance, or configuration facility.

1        2.        The system of claim 1, wherein the one or more vehicles includes a  
2        combination of any of the following:

3                (i)        passenger cars;

4                (ii)       light trucks;

5                (iii)      vans; and

6                (iv)      heavy trucks.

1        3.        The system of claim 1, wherein said format understandable by said  
2        onboard coupled to the data bus of the one or more vehicles is binary.

1        4.        The system of claim 1, wherein at least a first portion of said  
2        communications means includes the global Internet.

1        5.        The system of claim 2, wherein at least a second portion of said  
2        communications means includes at least one of the following:

- 3            (i)        satellite communications;
- 4            (ii)       code division multiple access (CDMA) communications;
- 5            (iii)      time division multiple access (TDMA) communications; and
- 6            (iv)      the Bluetooth® wireless communications.

1        6.        A system for a vehicle onboard unit that allows a user to perform remote  
2        vehicle diagnostics, vehicle monitoring, vehicle configuration and vehicle  
3        reprogramming, comprising:

- 4            (A)       a central processing unit (CPU);
- 5            (B)       user input/output (I/O) channel ports for receiving  
6        communications from the user;
- 7            (C)       a first application program interface means, executing on said  
8        CPU, for extracting a command from said communications received by said user  
9        I/O channel ports, wherein said command includes information specifying a  
10       vehicle and at least one vehicle parameter;
- 11          (D)       vehicle input/output (I/O) channel ports for receiving and sending  
12       communications to a vehicle data bus located on said vehicle;
- 13          (E)       a second application program interface means, executing on said  
14       CPU, for communicating said command, via said vehicle I/O channel ports, to  
15       said vehicle data bus thereby causing said at least one vehicle parameter to be  
16       read or changed;

17                whereby said system allows the user to perform total fleet logistics by  
18       facilitating vehicle parameter changes, vehicle health tracking, and receipt of

19 vehicle maintenance need indications, thus eliminating the need to physically  
20 bring said vehicle to a repair, maintenance or configuration facility.

1 7. The system of claim 6, wherein said first application program interface  
2 means includes means for extracting said command from one of the following  
3 types of communications received on said user I/O channel ports:

- 4 (i) satellite communications;
- 5 (ii) code division multiple access (CDMA) communications;
- 6 (iii) time division multiple access (TDMA) communications;
- 7 (iv) the Bluetooth® wireless communications;
- 8 (v) USB; and
- 9 (vi) IDB.

1 8. The system of claim 6 wherein said second application program interface  
2 means includes one of the following application program interfaces:

- 3 (i) SAE J1708;
- 4 (i) SAE J1587;
- 5 (iii) SAE J1939;
- 6 (iv) SAE OBD II; and
- 7 (v) manufacturer proprietary interfaces.

1 9. A method for allowing a user to perform remote diagnostics, monitoring  
2 configuring, and reprogramming for a fleet of vehicles, comprising the steps of:

- 3 (1) accessing a repository database in order to provide the user with  
4 a list of specific vehicles within the fleet of vehicles and a list of associated  
5 vehicle parameters;
- 6 (2) receiving, via a graphical user interface (GUI), a command from  
7 the user, wherein said command includes information specifying at least one  
8 vehicle from said list of vehicles and one vehicle parameter from said list of  
9 associated vehicle parameters;

(3) storing said command in said repository database along with the time and date that said command was received from the user;

(4) converting said command from a format understandable by the user using said GUI to a format understandable by an onboard unit located on said at least one vehicle;

(5) sending said command, via a wireless mobile communications system, in said format understandable by said onboard unit located on said at least one vehicle, thereby causing said at least one vehicle parameter to be read or changed;

(6) receiving an acknowledgment of said command from said onboard unit, via said wireless mobile communications system; and

(7) storing said acknowledgment in said repository database so that the user may later retrieve said acknowledgment using said GUI;

whereby said method allows the user to perform total fleet logistics by facilitating vehicle parameter changes, vehicle health tracking, and receipt of vehicle maintenance need indications, thus eliminating the need to physically bring vehicles within the fleet to a repair, maintenance, or configuration facility.

10. The method of claim 9, wherein at least a portion of said GUI is provided to the user via the global Internet.

11. The method of claim 9, wherein at least a portion of said wireless mobile communications system includes at least one of the following:

- (i) satellite communications;
- (ii) code division multiple access (CDMA) communications;
- (iii) time division multiple access (TDMA) communications; and
- (iv) the Bluetooth® wireless communications.

12. A computer program product comprising a computer usable medium having control logic stored therein for causing a computer to provide remote

diagnostics, monitoring, configuring and reprogramming for a fleet of vehicles, said control logic comprising:

first computer readable program code means for causing the computer to access a repository database in order to provide the user with a list of specific vehicles within the fleet of vehicles and a list of associated vehicle parameters;

second computer readable program code means for causing the computer to receive, via a graphical user interface (GUI), a command from the user, wherein said command includes information specifying at least one vehicle from said list of vehicles and one vehicle parameter from said list of associated vehicle parameters;

third computer readable program code means for causing the computer to store said command in said repository database along with the time and date that said command was received from the user;

fourth computer readable program code means for causing the computer to convert said command from a format understandable by the user using said GUI to a format understandable by an onboard unit located on said at least one vehicle;

fifth computer readable program code means for causing the computer to send said command, via a wireless mobile communications system, in said format understandable by said onboard unit located on said at least one vehicle, thereby causing said at least one vehicle parameter to be read or changed;

sixth computer readable program code means for causing the computer to receive an acknowledgment of said command from said onboard unit, via said wireless mobile communications system; and

seventh computer readable program code means for causing the computer to store said acknowledgment in said repository database so that the user may later retrieve said acknowledgment using said GUI;

whereby said computer program product allows the user to perform total fleet logistics by facilitating vehicle parameter changes, vehicle health tracking, and receipt of vehicle maintenance need indications, thus eliminating the need to

33

34



**SYSTEM, METHOD AND COMPUTER PROGRAM PRODUCT  
FOR REMOTE VEHICLE DIAGNOSTICS, MONITORING,  
CONFIGURING AND REPROGRAMMING**

***Abstract***

5           A remote vehicle diagnostics, monitoring, configuration and  
reprogramming tool is provided. The system includes a fleet of vehicles  
equipped with wireless mobile communications means that enable fleet managers  
to remotely diagnose, monitor and reprogram vehicles in their fleet via an Internet  
Web-based browser environment. Each vehicle within the fleet is equipped with  
10   a smart device that is coupled to the data bus within each vehicle. Data  
commands relating to the vehicle's parameters (e.g., diagnostic parameters such  
as max road speed, engine RPM, coolant temperature, air inlet temperature, etc.)  
are sent and received using satellite and terrestrial wireless communications  
technology. The invention allows users to remotely perform total fleet logistics  
15   and eliminates (or reduces) the need to physically bring fleet vehicles to a repair,  
maintenance or configuration facility.

A278-84.wpd

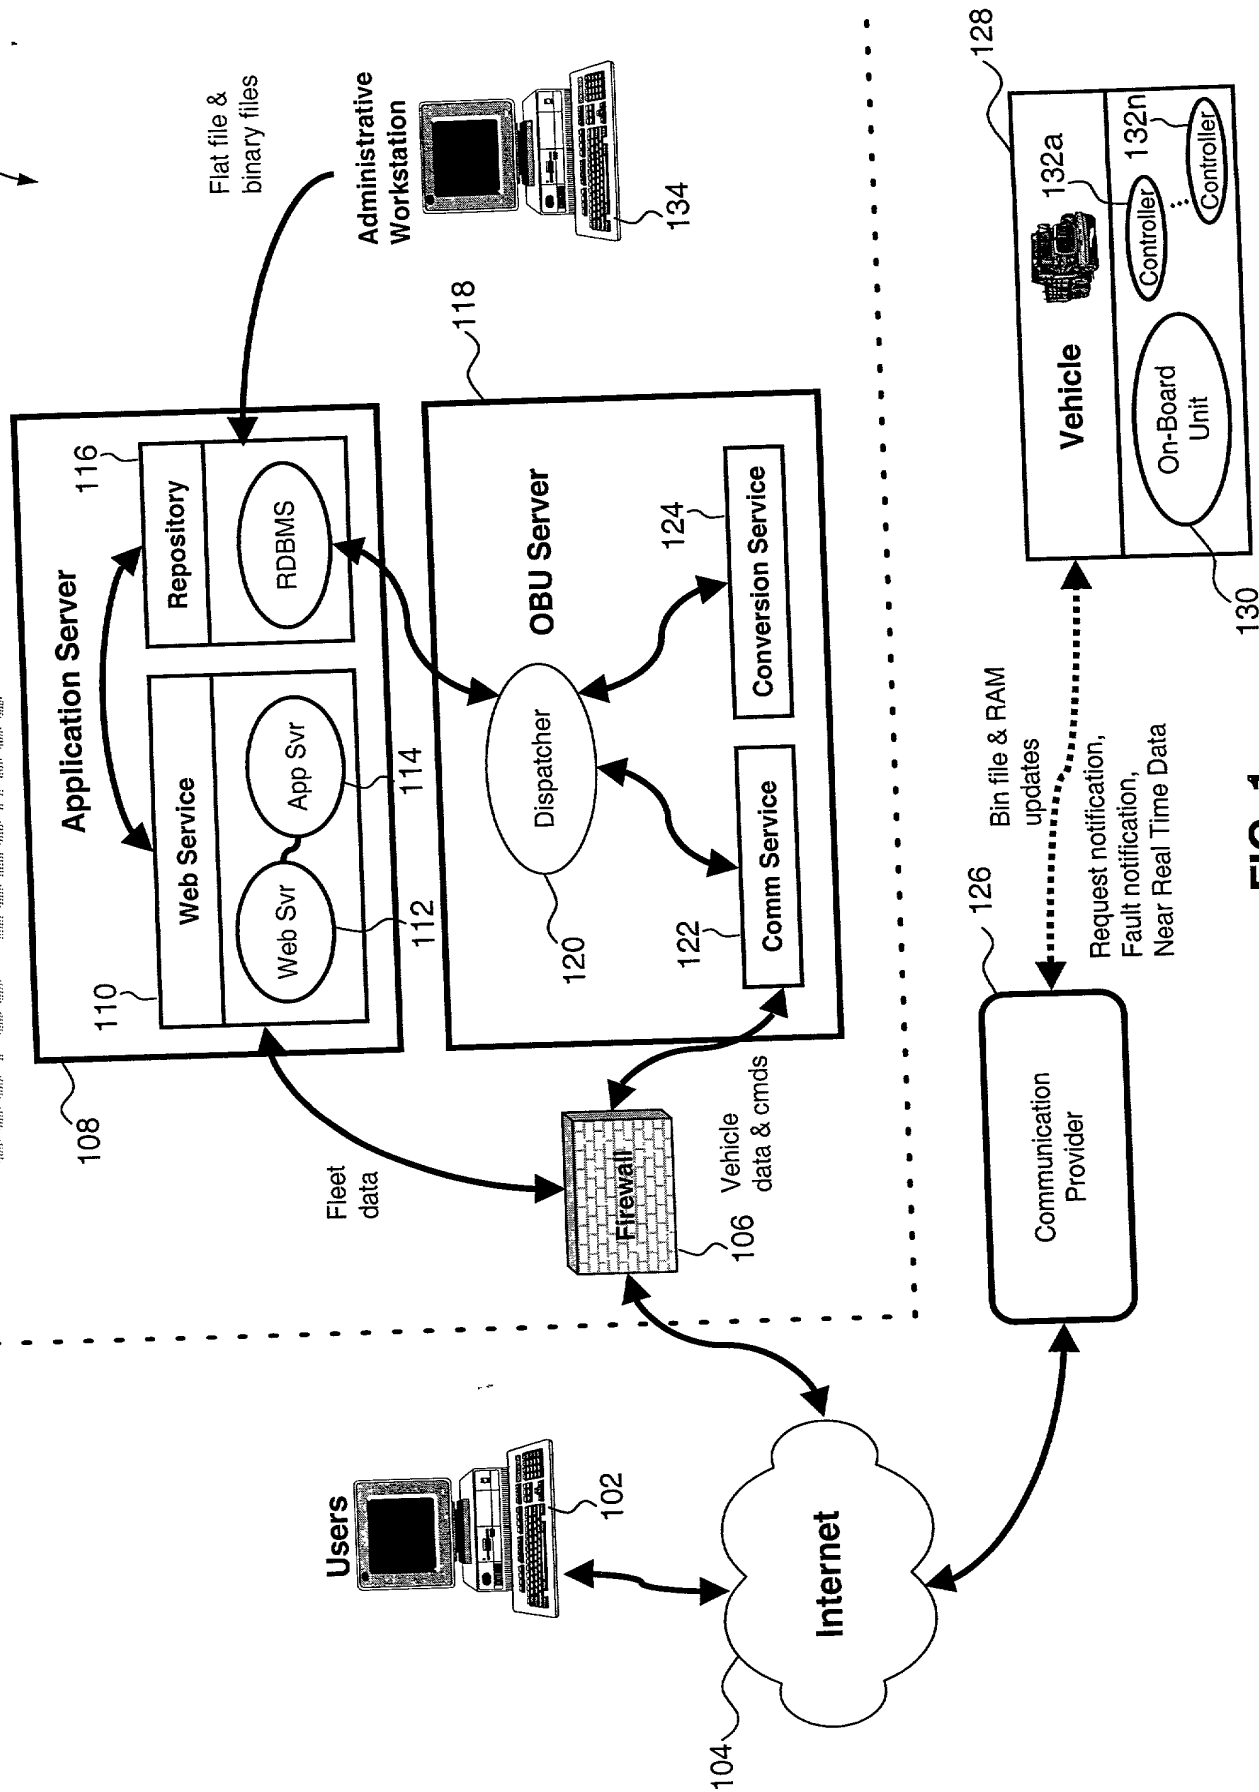


FIG. 1

130

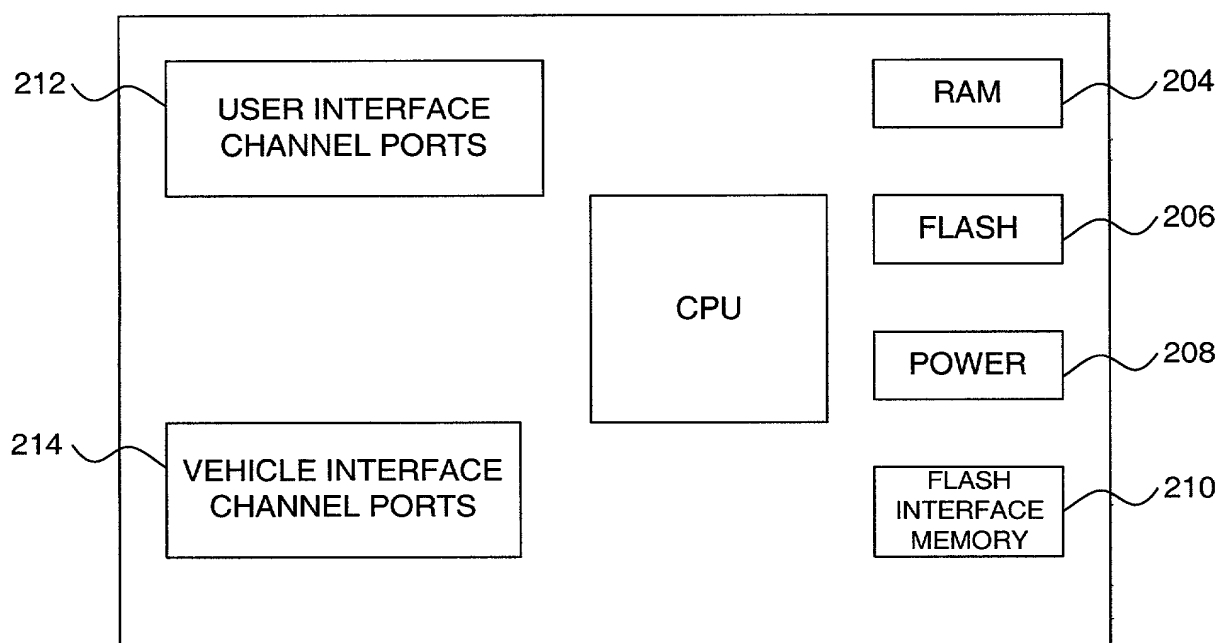


FIG. 2A

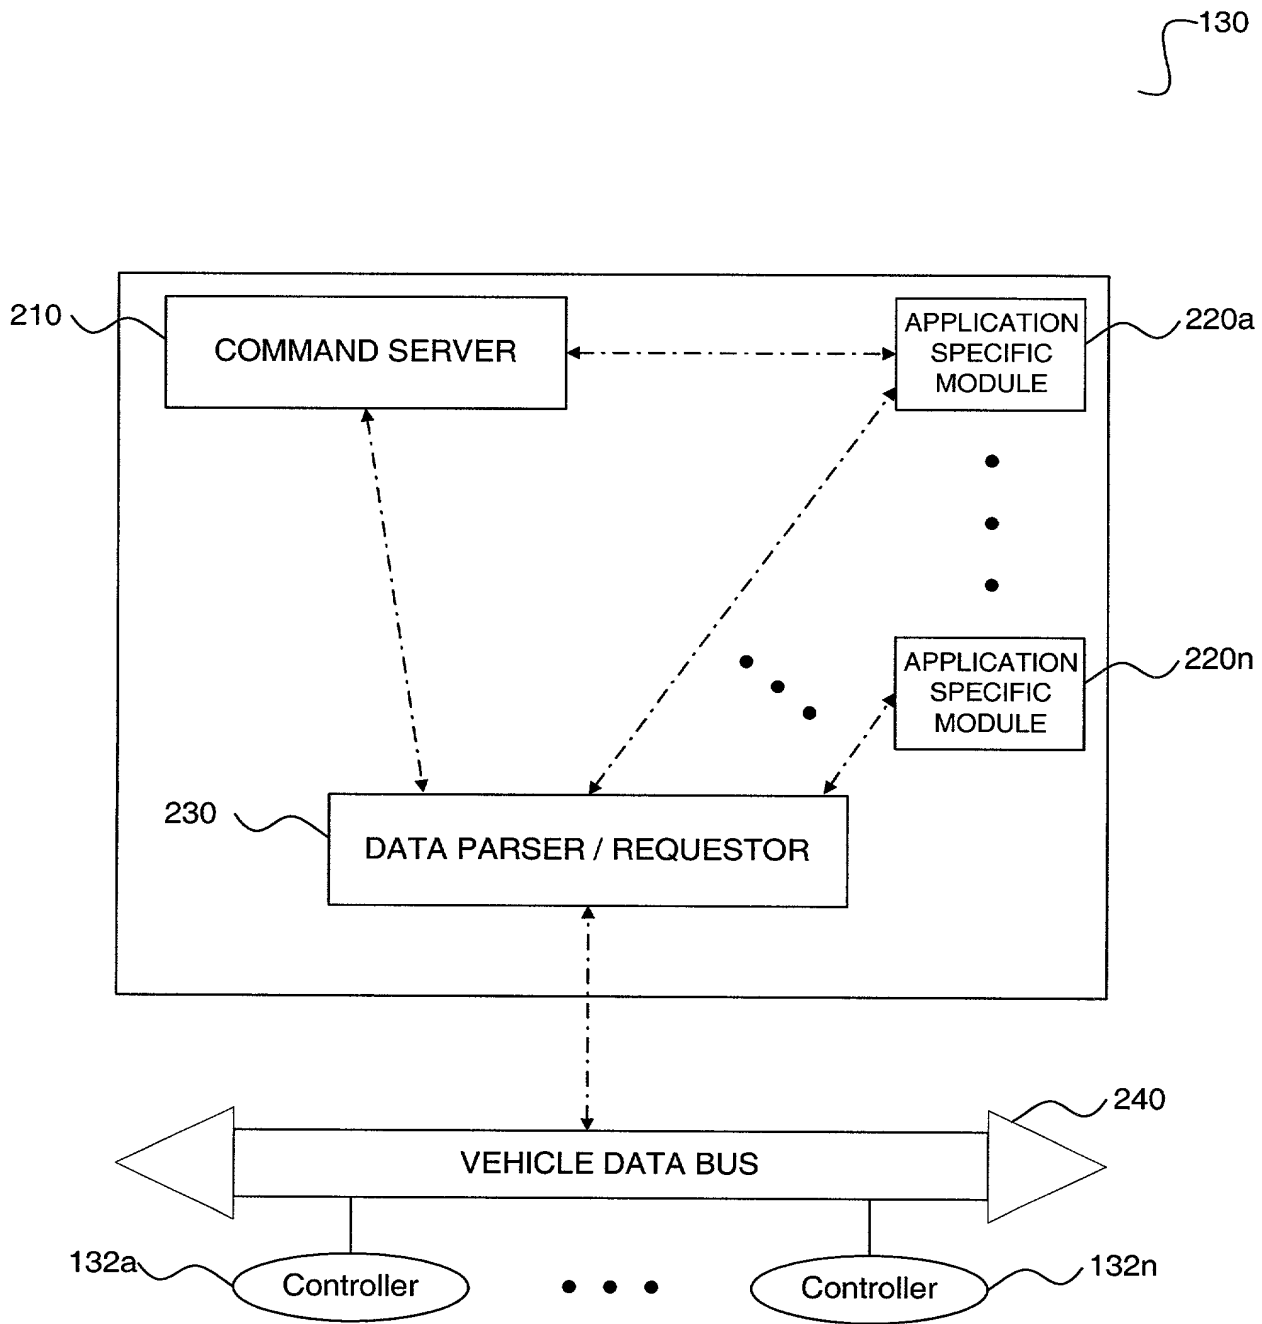


FIG. 2B

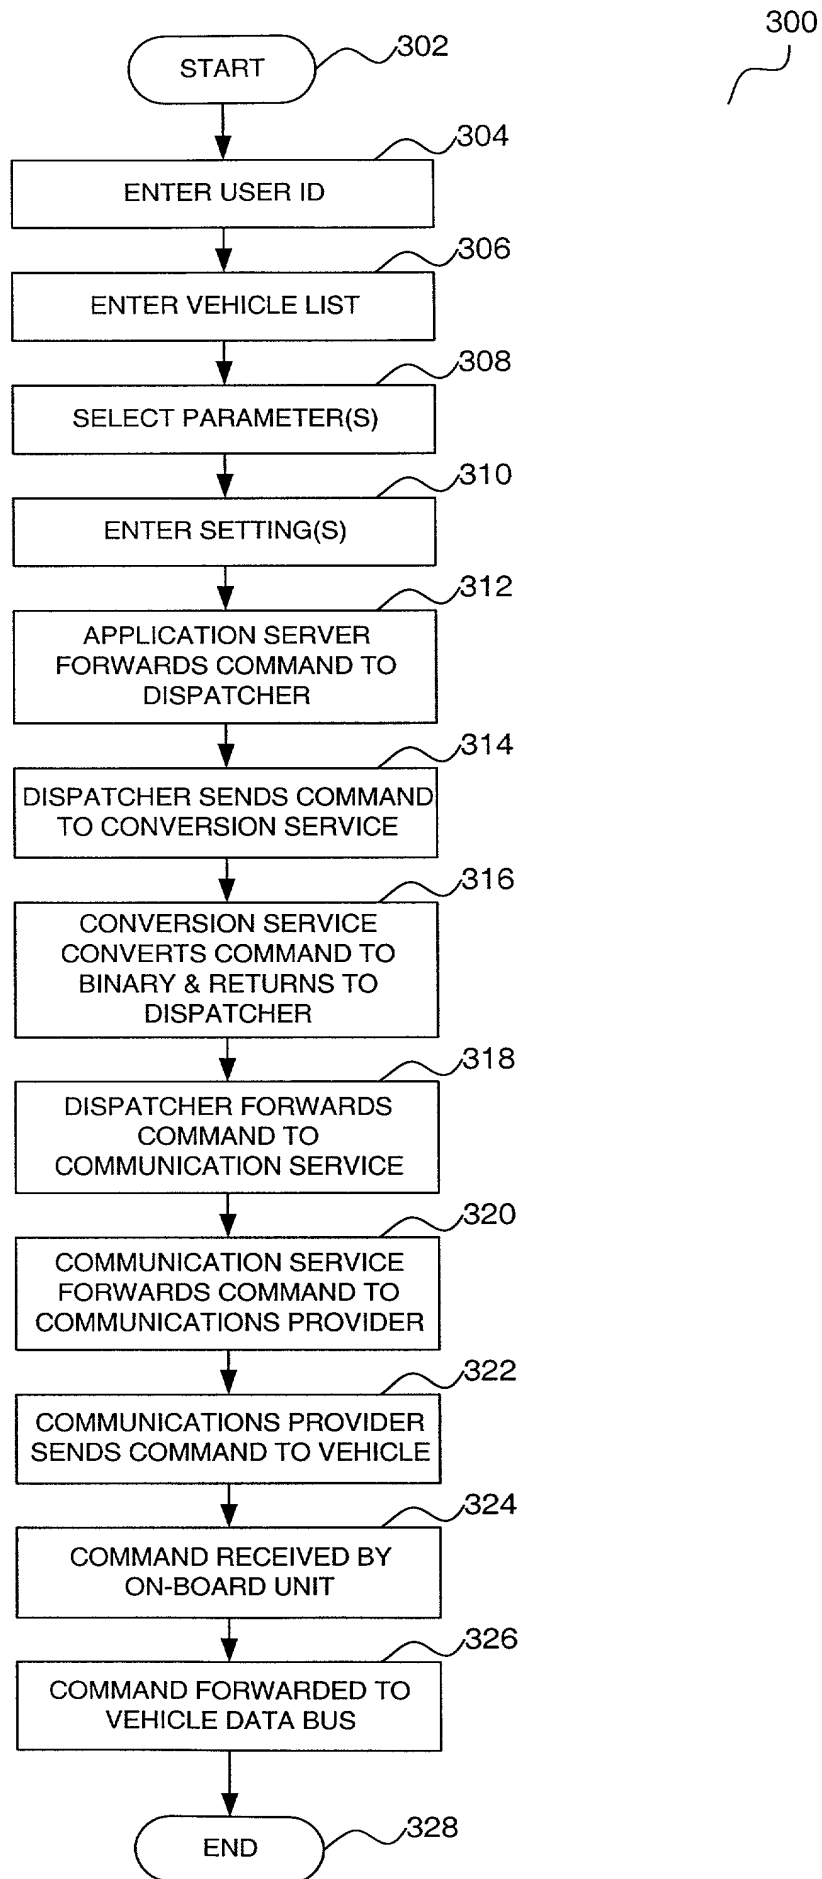


FIG. 3

FLEET MONITOR

Alerts

- Setup
- View

Parameters

- Setup
- View - Trans
- View - Date

Alert - Setup



Select Fleet  
MPSI DDEC Fleet



Set Alert Reporting  
Checked boxes will enable alert reporting from the corresponding vehicle  
Un-checked boxes will disable alert reporting from the corresponding vehicle

Vehicle Unit ID	Description	T. Codes	Tamper
DDEC 1	Sterling Truck ST9500 2000	<input type="checkbox"/>	<input type="checkbox"/>
DDEC 2	Freightliner Century 2000	<input type="checkbox"/>	<input type="checkbox"/>

Select All

Clear All

Select All

Clear All

Submit

FIG. 4A

09640785 081800

# FLEET MONITOR

Alerts  
 Setup  
 View

Parameters  
 Setup  
 View - Trans  
 View - Date

Reprogramming  
 Setup  
 View

## Alerts - View

1 Select Date Range  
 01/01/2000 to 08/15/2000

2 Select Fleet  
 MPSI DDEC Fleet

3 View Results  
 The results of your query are shown below. Records are displayed in reverse date order.

Reading Date/Time	Vehicle Unit ID	Parameter Name	Alert Value
08/03/2000 06:08:47	DDEC 2	Vehicle Speed Limit	Tamper Alert on VEHICLE SPEED LIMIT! Value changed from 70 mph to 80 mph.
08/03/2000 06:08:42	DDEC 2	Fault Code Alert	STATUS: ACTIVE; FLASH CODE: 34; PID: 102; FMI: 4; TURBO BOOST SENSOR INPUT VOLTAGE LOW
07/28/2000 14:20:26	DDEC 2	Fault Code Alert	STATUS: ACTIVE; FLASH CODE: 34; PID: 102; FMI: 4; TURBO BOOST SENSOR INPUT VOLTAGE LOW
07/28/2000 14:18:24	DDEC 2	Fault Code Alert	STATUS: ACTIVE; FLASH CODE: 34; PID: 102; FMI: 4; TURBO BOOST SENSOR INPUT VOLTAGE LOW
07/28/2000 14:12:54	DDEC 2	Vehicle Speed Limit	Tamper Alert on VEHICLE SPEED LIMIT! Value changed from 70 mph to 80 mph.
07/28/2000 14:05:41	DDEC 2	Fault Code Alert	STATUS: ACTIVE; FLASH CODE: 34; PID: 102; FMI: 4; TURBO BOOST SENSOR INPUT VOLTAGE LOW
07/24/2000 20:11:00	DDEC 1	Fault Code Alert	STATUS: ACTIVE; FLASH CODE: 82; PID: 98; FMI: 4; OIL LEVEL SENSOR INPUT VOLTAGE LOW
07/24/2000 18:01:03	DDEC 1	Fault Code Alert	STATUS: ACTIVE; FLASH CODE: 82; PID: 98; FMI: 4; OIL LEVEL SENSOR INPUT VOLTAGE LOW
07/24/2000 17:46:47	DDEC 1	Fault Code Alert	STATUS: ACTIVE; FLASH CODE: 82; PID: 98; FMI: 4; OIL LEVEL SENSOR INPUT VOLTAGE LOW
07/21/2000 11:07:33	DDEC 1	Fault Code Alert	STATUS: ACTIVE; FLASH CODE: 82; PID: 98; FMI: 4; OIL LEVEL SENSOR INPUT VOLTAGE LOW
07/21/2000 10:58:36	DDEC 2	Vehicle Speed Limit	Tamper Alert on VEHICLE SPEED LIMIT! Value changed from 70 mph to 80 mph.
07/13/2000 12:12:37	DDEC 2	Fault Code Alert	STATUS: ACTIVE; FLASH CODE: 34; PID: 102; FMI: 4; TURBO BOOST SENSOR INPUT VOLTAGE LOW
07/13/2000 12:12:28	DDEC 2	Vehicle Speed Limit	Tamper Alert on VEHICLE SPEED LIMIT! Value changed from 70 mph to 80 mph.
07/10/2000 15:55:16	DDEC 1	Fault Code Alert	STATUS: ACTIVE; FLASH CODE: 82; PID: 98; FMI: 4; OIL LEVEL SENSOR INPUT VOLTAGE LOW
05/25/2000 10:59:43	DDEC 2	Vehicle Speed Limit	Tamper Alert on VEHICLE SPEED LIMIT! Value changed from 70 mph to 80 mph.
05/24/2000 16:54:34	DDEC 2	Vehicle Speed Limit	Tamper Alert on VEHICLE SPEED LIMIT! Value changed from 70 mph to 80 mph.
05/22/2000 11:11:47	DDEC 2	Vehicle Speed Limit	Tamper Alert on VEHICLE SPEED LIMIT! Value changed from 70 mph to 80 mph.
05/22/2000 11:11:42	DDEC 2	Fault Code Alert	STATUS: ACTIVE; FLASH CODE: 34; PID: 102; FMI: 4; TURBO BOOST SENSOR INPUT VOLTAGE LOW
05/21/2000 17:11:49	DDEC 1	Fault Code Alert	STATUS: ACTIVE; FLASH CODE: 82; PID: 98; FMI: 4; OIL LEVEL SENSOR INPUT VOLTAGE LOW
05/21/2000 17:05:15	DDEC 2	Vehicle Speed Limit	Tamper Alert on VEHICLE SPEED LIMIT! Value changed from 70 mph to 80 mph.
05/21/2000 17:05:10	DDEC 2	Fault Code Alert	STATUS: ACTIVE; FLASH CODE: 34; PID: 102; FMI: 4; TURBO BOOST SENSOR INPUT VOLTAGE LOW

FIG. 4B

## FLEET MONITOR

■ Alerts  
 ▶ Setup  
 ▶ View

■ Parameters  
 ▶ Setup  
 ▶ View - Trans  
 ▶ View - Date

■ Reprogramming  
 ▶ Setup  
 ▶ View

### Parameters - Setup

**1** Select Fleet  
 MPSI DDEC Fleet

**2** Select Vehicle  
 (All)

**3** Select Parameter Profile  
 Click the "Select" button next to the parameter set that you wish to query

**4** Submit Request  
 Enter a description for this request, and then click the "Submit" button to query the selected vehicle(s)

### DDEC Engine Config

**SELECT**

Parameter Name	Parameter Name	Parameter Name	Parameter Name
Air Temp TQ Limit	Cruise Control Enable	Cruise Set	ECM 128 Cylinder
Engine Series	Idle Speed RPM	Max Cruise Speed	Min Cruise Speed
Optimized Idle	Override	Shutdown	Software Version
Sys Active	Torque Reduction Factor	VSG Set RPM	VSS Enable
Vehicle Speed Enable	Vehicle Speed Limit		

### DDEC Engine Data

**SELECT**

Parameter Name	Parameter Name	Parameter Name	Parameter Name
Air Inlet Temperature	Beginning of Injection	Boost	Byp Value
Coolant Temperature	ECM Volts	Engine Brake	Engine Brake Percentage
Engine RPM	Exhaust Temperature	Fuel Pressure	Fuel Temperature
ISD Driver Alert Mode	Idle Shutdown Status	Inject Pressure	Intake Air Temperature
Intercool Temperature	Knock Control	Knock Volts	Oil Pressure
Oil Temperature	PWM #1	Pulse Width	Shutdown
Speed Adjust	TPS Counts	TPS Percentage	Torque Reduction Factor
Turbo Speed	Vehicle Speed		

### DDEC Engine Info

**SELECT**

Parameter Name	Parameter Name	Parameter Name	Parameter Name
Active Codes	Air Filter RS	Air Inlet	Air Temp TQ Limit
Alarm	Ambient Air Temperature	Barometric Pressure	Barometric Pressure
Cool Level	Coolant Pressure	Crankcase Pressure	Cruise Set
Engine Governor	Engine Load Percentage	Engine Series	Ext Pump Pressure
Half Engine Mode Status	Idle Shutdown State	Inactive Codes	Inj Pump Usage
Oil Filter RS	Oil Level	Oil Level	Override
SRS Received	Seq Turbo	Start Relay	T-Stat
Torque	Torque	VSG Counts	VSG Set RPM

### DDEC Odometer Only

**SELECT**

Parameter Name	Parameter Name	Parameter Name	Parameter Name
Total Odometer			

FIG. 5A



# FLEET MONITOR

## Alerts

- Setup
- View

## Parameters

- Setup
- View - Trans
- View - Date

## Reprogramming

- Setup
- View

### Parameters - View by Transaction



#### 1 Select Transaction

Select the transaction you wish to view Transactions are listed in reverse date order



#### 2 View Results

The results for the selected transaction are shown below

Transaction Description	Submitted By	Submitted On	Param Profile Requested	
DDEC Odometer Only for DDEC 1	bcarl	08/11/2000 05:23:57 PM	DDEC Odometer Only	SELECT
DDEC Engine Config for DDEC 1	bcarl	08/11/2000 05:23:32 PM	DDEC Engine Config	SELECT
DDEC Engine Config for DDEC 1	bcarl	08/11/2000 05:23:11 PM	DDEC Engine Config	SELECT
DDEC Trip Data for DDEC 2	bcarl	08/11/2000 05:12:30 PM	DDEC Trip Data	SELECT
DDEC Engine Config for DDEC 1	bcarl	08/11/2000 05:12:10 PM	DDEC Engine Config	SELECT
DDEC Trip Data for MPSI DDEC Fleet	bcarl	08/11/2000 05:11:02 PM	DDEC Trip Data	SELECT
DDEC 1 new config 2	bcarl	08/10/2000 04:05:32 PM	DDEC Engine Config	SELECT
DDEC 1 new config	bcarl	08/10/2000 04:04:47 PM	DDEC Engine Config	SELECT
DDEC Engine Config for DDEC 2	bcarl	08/08/2000 02:58:39 PM	DDEC Engine Config	SELECT
DDEC Engine Info for DDEC 2	schang	08/08/2000 07:51:31 AM	DDEC Engine Info	SELECT
DDEC Total Engine for MPSI DDEC Fleet	guest	08/02/2000 11:32:06 PM	DDEC Total Engine	SELECT
DDEC Engine Config for DDEC 2	bcarl	08/02/2000 09:17:44 AM	DDEC Engine Config	SELECT
DDEC Engine Config for DDEC 1	bcarl	08/02/2000 09:17:32 AM	DDEC Engine Config	SELECT
DDEC Engine Config for MPSI DDEC Fleet	bcarl	08/02/2000 09:17:18 AM	DDEC Engine Config	SELECT
Mack Engine Info for Mack 2	bcarl	08/02/2000 09:16:42 AM	Mack Engine Info	SELECT
DDEC Engine Config for DDEC 2	bcarl	08/02/2000 09:01:21 AM	DDEC Engine Config	SELECT
my description for this request	guest	08/01/2000 03:31:20 PM	DDEC Engine Config	SELECT
DDEC Engine Config for DDEC 2	bcarl	07/28/2000 02:01:43 PM	DDEC Engine Config	SELECT
DDEC Engine Config for DDEC 2	bcarl	07/28/2000 02:01:31 PM	DDEC Engine Config	SELECT
DDEC Engine Config for DDEC 1	bcarl	07/28/2000 01:51:22 PM	DDEC Engine Config	SELECT
DDEC Engine Config for DDEC 1	bcarl	07/28/2000 01:49:22 PM	DDEC Engine Config	SELECT
DDEC Engine Config for DDEC 1	bcarl	07/28/2000 01:48:43 PM	DDEC Engine Config	SELECT
Mack Engine Info for Mack 1	bcarl	07/28/2000 01:33:35 PM	Mack Engine Info	SELECT
DDEC Engine Config for DDEC 1	bcarl	07/28/2000 01:33:05 PM	DDEC Engine Config	SELECT
DDEC Engine Config for DDEC 1	bcarl	07/28/2000 01:31:18 PM	DDEC Engine Config	SELECT
DDEC Engine Config for DDEC 1	bcarl	07/28/2000 01:28:58 PM	DDEC Engine Config	SELECT
DDEC Engine Config for DDEC 1	bcarl	07/28/2000 01:25:58 PM	DDEC Engine Config	SELECT
DDEC Engine Config for DDEC 1	bcarl	07/28/2000 01:24:16 PM	DDEC Engine Config	SELECT
DDEC Engine Config for DDEC 1	bcarl	07/28/2000 10:37:55 AM	DDEC Engine Config	SELECT
DDEC Engine Config for DDEC 1	bcarl	07/28/2000 10:34:52 AM	DDEC Engine Config	SELECT
DDEC Engine Config for DDEC 1	bcarl	07/28/2000 10:33:33 AM	DDEC Engine Config	SELECT
DDEC Engine Config for DDEC 1	bcarl	07/28/2000 10:25:34 AM	DDEC Engine Config	SELECT

FLEET MONITOR

- Alerts
- Setup
- View
- Parameters
- Setup
- View - Trans
- View - Date
- Reprogramming
- Setup
- View

Parameters - View by Transaction

1 Select Transaction

DDEC Trip Data for Werner Fleet 3

2 View Results

The results for the selected transaction are shown below.

520

Transaction details:

Description: DDEC Trip Data for Werner Fleet 3  
Data Profile Requested: DDEC Trip Data  
Submitting user: werner  
Submit date/time: 08/12/2000 10:38:03 AM  
Last response at: 08/12/2000 05:50:26 PM

524

Vehicle Unit ID	Trip Average Fuel	Trip Avg Fuel Economy	Trip Cruise Time	Trip Distance	Trip Driving Avg Load	Trip Engine Brake Time	Trip Engine Time	Trip Fuel Used	Trip Idle Fuel Used	Trip Opt Idle Fuel Savings	Trip Opt Idle Time Savings	Trip VSG Fuel Used	Trip VSG Time
31481	4.8 GPH	6.3 MPG	29.1 HR	2611.9 mi	44 %	1.5 HR	86.1 HR	414.1 GAL	29.3 GAL	N/A	N/A HR	28.0 GAL	38.1 HR
31541	5.0 GPH	5.8 MPG	66.9 HR	6063.5 mi	46 %	4.3 HR	208.2 HR	1035.0 GAL	71.4 GAL	N/A	N/A HR	68.8 GAL	96.5 HR
31556	6.3 GPH	6.3 MPG	27.9 HR	2938.4 mi	45 %	1.1 HR	74.1 HR	468.5 GAL	16.8 GAL	N/A	N/A HR	14.6 GAL	19.5 HR
31557	3.6 GPH	5.9 MPG	9.6 HR	1218.8 mi	39 %	0.4 HR	56.5 HR	206.0 GAL	20.4 GAL	N/A	N/A HR	18.0 GAL	26.4 HR
31632	5.3 GPH	6.3 MPG	15.9 HR	3106.7 mi	43 %	3.5 HR	92.8 HR	494.0 GAL	28.1 GAL	N/A	N/A HR	27.6 GAL	36.3 HR
31635	3.9 GPH	5.8 MPG	13.7 HR	1693.5 mi	45 %	1.3 HR	74.8 HR	289.9 GAL	22.9 GAL	N/A	N/A HR	20.9 GAL	40.9 HR
31636	4.3 GPH	6.4 MPG	8.0 HR	951.4 mi	42 %	0.7 HR	34.3 HR	148.8 GAL	12.6 GAL	N/A	N/A HR	12.3 GAL	17.0 HR
31637	4.0 GPH	5.3 MPG	9.6 HR	1923.6 mi	47 %	0.7 HR	91.2 HR	360.9 GAL	40.9 GAL	N/A	N/A HR	39.9 GAL	55.0 HR
31638	6.3 GPH	7.3 MPG	50.4 HR	3760.0 mi	40 %	0.6 HR	81.4 HR	515.1 GAL	8.5 GAL	N/A	N/A HR	7.6 GAL	11.4 HR
31639	4.7 GPH	6.7 MPG	15.3 HR	2906.4 mi	42 %	0.1 HR	92.3 HR	435.3 GAL	21.4 GAL	N/A	N/A HR	19.6 GAL	39.1 HR
31642	3.8 GPH	5.1 MPG	15.5 HR	1675.2 mi	50 %	0.0 HR	85.1 HR	326.5 GAL	33.1 GAL	N/A	N/A HR	31.8 GAL	52.8 HR

# FLEET MONITOR

■ Alerts  
 ↳ Setup  
 ↳ View

■ Parameters  
 ↳ Setup  
 ↳ View - Trans  
 ↳ View - Date

■ Reprogramming  
 ↳ Setup  
 ↳ View

## Reprogramming - Setup

① Select Fleet  
 Werner Fleet 3

② Select Parameter  
 Vehicle Speed Limit

③ Enter values  
 Indicate new settings (without units) for each vehicle in the fields provided. If a vehicle has no entry box, then it cannot be reprogrammed for the selected parameter.

For Available Settings for Enumerated Reprogramable Parameters [Click here](#)

Vehicle Unit ID	Description	Current Setting	New Setting
31457	Freightliner Classic XL 2000	66 mph	<input type="text"/>
31481	Freightliner Classic XL 2000	66 mph	<input type="text"/>
31541	Freightliner Classic XL 2000	66 mph	<input type="text"/>
31542	Freightliner Classic XL 2000	66 mph	<input type="text"/>
31556	Freightliner Classic XL 2000	65 mph	<input type="text"/>
31557	Freightliner Classic XL 2000	66 mph	<input type="text"/>
31589	Freightliner Classic XL 2000	64 mph	<input type="text"/>
31599	Freightliner Classic XL 2000	Unknown	<input type="text"/>
31632	Freightliner Classic XL 2000	64 mph	<input type="text"/>
31635	Freightliner Classic XL 2000	66 mph	<input type="text"/>
31636	Freightliner Classic XL 2000	64 mph	<input type="text"/>
31637	Freightliner Classic XL 2000	65 mph	<input type="text"/>
31638	Freightliner Classic XL 2000	65 mph	<input type="text"/>
31639	Freightliner Classic XL 2000	65 mph	<input type="text"/>
31642	Freightliner Classic XL 2000	65 mph	<input type="text"/>

Submit

FIG. 6A

610

# FLEET MONITOR

- Alerts
  - Setup
  - View
- Parameters
  - Setup
  - View - Trans
  - View - Date
- Reprogramming
  - Setup
  - View

## Reprogramming - View

 **1 Select Fleet**  
Werner Fleet 3

 **2 Select Vehicle**  
All Vehicles

 **3 Select Parameter/Status**  
Vehicle Speed Limit

 **4 View Results**  
The results of your query are shown below. The records are ordered by vehicle, then parameter


612 614 616 618 620 622

Vehicle	Parameter	Submit Date/Time	Current	Requested	Status
31457	Vehicle Speed Limit	08/14/2000 06:17:11	66 mph	65	Sending
31481	Vehicle Speed Limit	08/14/2000 06:17:11	66 mph	65	Message Sent to Vehicle. (12/31/1999 20:01:01)
31541	Vehicle Speed Limit	08/14/2000 06:17:12	66 mph	65	Pending (08/14/2000 06:24:34) Sending
31542	Vehicle Speed Limit	08/14/2000 06:17:12	66 mph	65	OK (08/13/2000 20:53:33)
31556	Vehicle Speed Limit	08/14/2000 06:17:12	65 mph	65	OK (08/14/2000 13:11:12)
31557	Vehicle Speed Limit	08/14/2000 06:17:12	66 mph	66	OK (08/14/2000 13:11:12)
31589	Vehicle Speed Limit	08/14/2000 06:17:12	64 mph	66	Message Sent to Vehicle. (12/31/1999 20:01:01)
31599	Vehicle Speed Limit	08/14/2000 06:17:12	Unknown	66	Message Sent to Vehicle. (12/31/1999 20:01:01)
31632	Vehicle Speed Limit	08/14/2000 06:17:12	64 mph	66	Pending (08/14/2000 07:45:27)
31635	Vehicle Speed Limit	08/14/2000 06:17:12	66 mph	66	OK (08/14/2000 12:36:39)
31636	Vehicle Speed Limit	08/14/2000 06:17:12	64 mph	65	Message Sent to Vehicle. (12/31/1999 20:01:01)
31637	Vehicle Speed Limit	08/14/2000 06:17:12	65 mph	65	OK (08/14/2000 14:05:18)
31638	Vehicle Speed Limit	08/14/2000 06:17:12	65 mph	65	OK (08/14/2000 09:23:07)
31639	Vehicle Speed Limit	08/14/2000 06:17:12	65 mph	65	OK (08/14/2000 11:55:48)
31642	Vehicle Speed Limit	08/14/2000 06:17:12	65 mph	65	Message Sent to Vehicle. (12/31/1999 20:01:01)

FIG. 6B

09640785 n 081600

Computer System 700

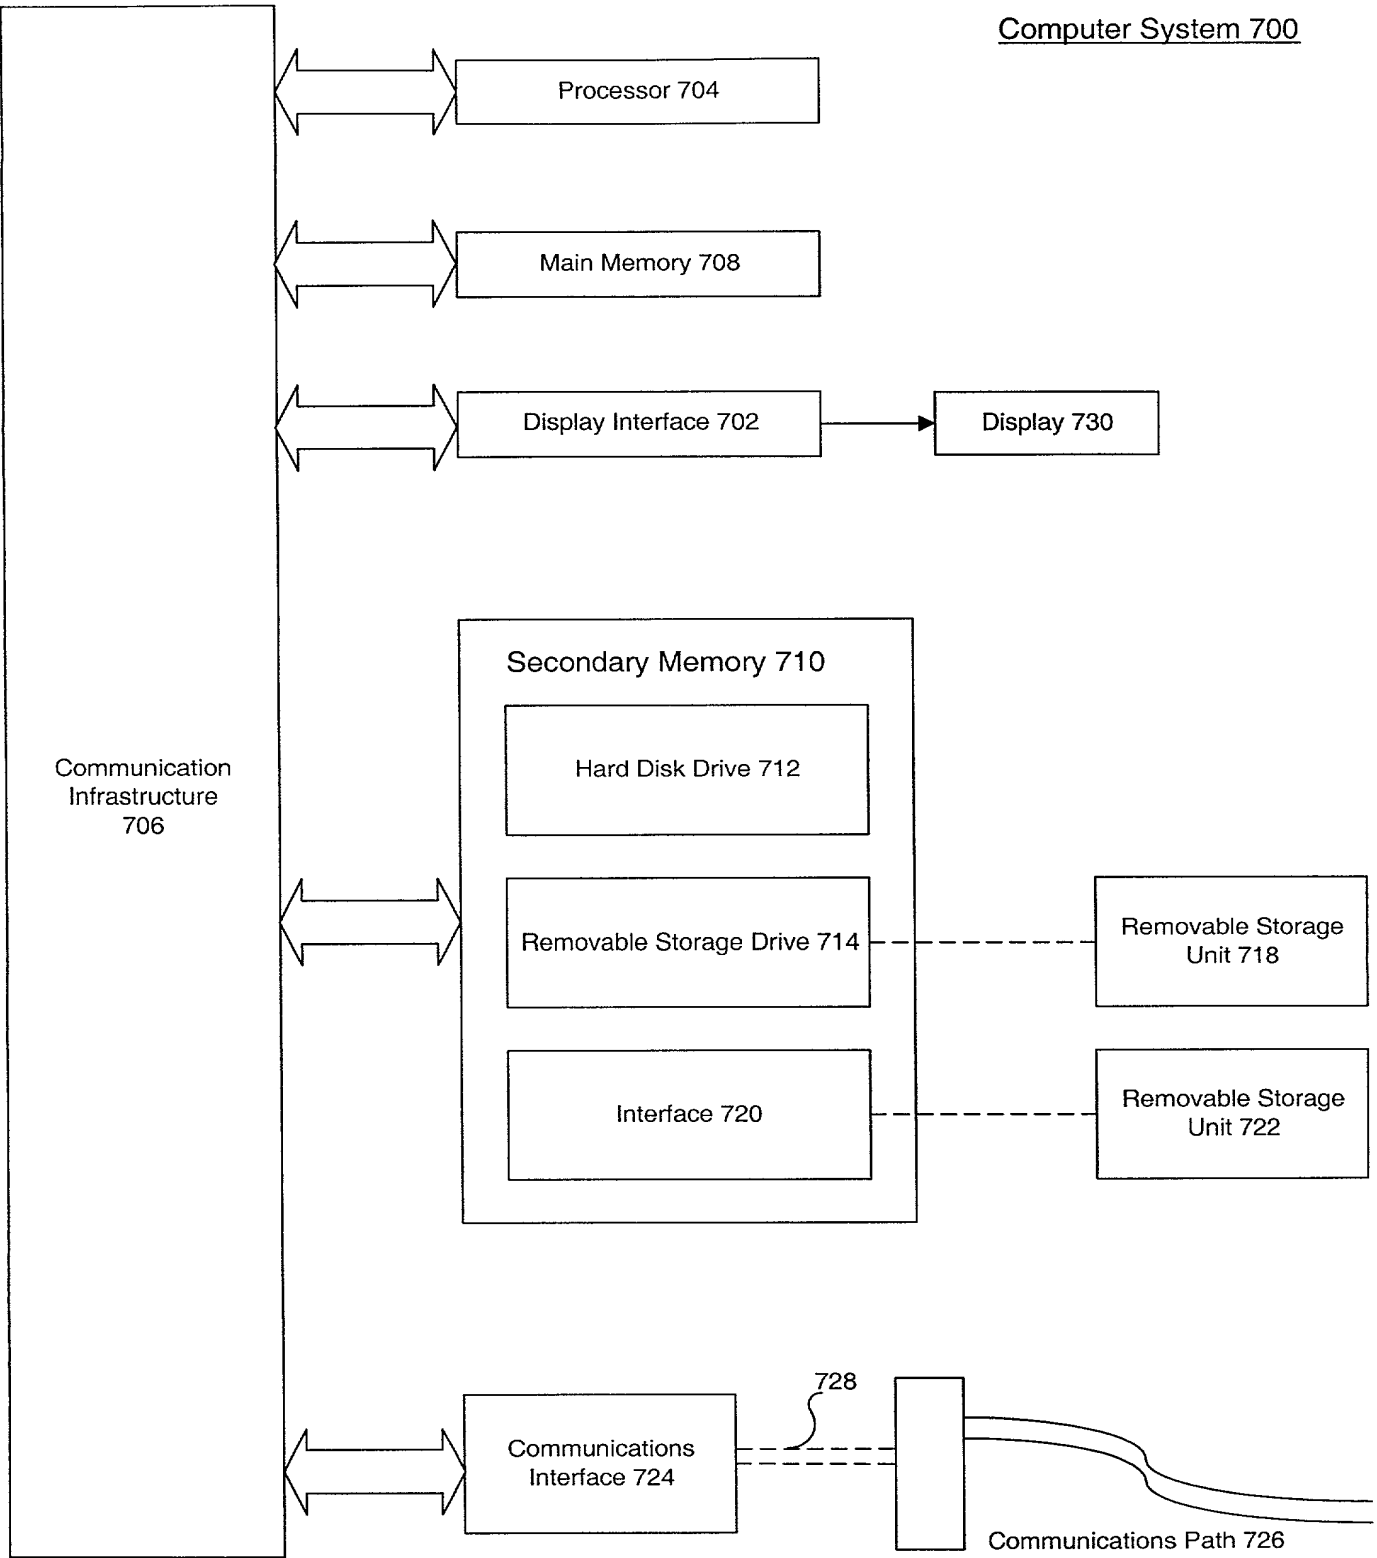

**FIG. 7**